ANCHORAGE NOTES

EQUIPMENT ANCHORAGE NOTE

ALL ELECTRICAL EQUIPMENT SHALL BE ANCHORED OR BRACED TO MEET THE HORIZONTAL AND VERTICAL FORCES PRESCRIBED IN THE 2007 CBC, SECTION 1614A.1.13 AND ASCE 7-05 SECTIONS 13.3, 13.4, 13.6, AND CHAPTER 6.

THE ATTACHMENT OF THE FOLLOWING ITEMS SHALL BE DESIGNED TO RESIST THE FORCES PRESCRIBED ABOVE, BUT NEED NOT BE DETAILED ON THE PLANS, AND THE PROJECT INSPECTOR WILL VERIFY THAT THESE ITEMS (EQUIPMENT) HAVE BEEN ANCHORED:

A. EQUIPMENT WEIGHING LESS THAN 400 POUNDS SUPPORTED DIRECTLY ON THE FLOOR OR ROOF.
B. FURNITURE REQUIRED TO BE ATTACHED IN ACCORDANCE WITH ASCE 7-05, SECTION 13.5.
C. TEMPORARY OR MOVABLE EQUIPMENT WITH FLEXIBLE CONNECTION TO POWER OR UTILITIES.
D. EQUIPMENT WEIGHING LESS THAN 20 POUNDS SUPPORTED BY VIBRATION ISOLATORS.
E. EQUIPMENT WEIGHING LESS THAN 20 POUNDS SUSPENDED FROM A ROOF OR FLOOR OR HUNG FROM A WALL.

FOR THOSE ELEMENTS THAT DO NOT REQUIRE DETAILS ON THE APPROVED DRAWINGS, THE INSTALLATION SHALL BE SUBJECT TO THE APPROVAL OF THE MECHANICAL/ELECTRICAL ENGINEER.

ELECTRICAL DISTRIBUTION SYSTEM BRACING NOTE

ELECTRICAL DISTRIBUTION SYSTEMS SHALL BE BRACED TO RESIST THE FORCES PRESCRIBED IN ASCE 7-05 SECTION 13.3 AS DEFINED IN ASCE 7-05 SECTION 13.6.8, 13.6.7, 13.6.5 ITEM 6, AND 2007 CBC 1614A.1.13.

THE BRACING AND ATTACHMENTS TO THE STRUCTURE SHALL COMPLY WITH ONE OF THE OSHPD PRE-APPROVALS WITH AN OPA#, SUCH AS MASON INDUSTRIES (OPA 349), OR ISAT (OPA 485) AS MODIFIED TO SATISFY ANCHORAGE REQUIREMENTS OF ACI 318, APPENDIX D.

COPIES OF THE MANUAL SHALL BE AVAILABLE ON THE JOBSITE PRIOR TO THE START OF HANGING AND BRACING OF THE PIPE, DUCTWORK, AND ELECTRICAL DISTRIBUTION SYSTEMS.

THE STRUCTURAL ENGINEER OF RECORD SHALL VERIFY THE ADEQUACY OF THE STRUCTURE TO SUPPORT THE HANGER AND BRACE LOADS.

MOUNTING HEIGHT OVER OBSTRUCTION DETAIL

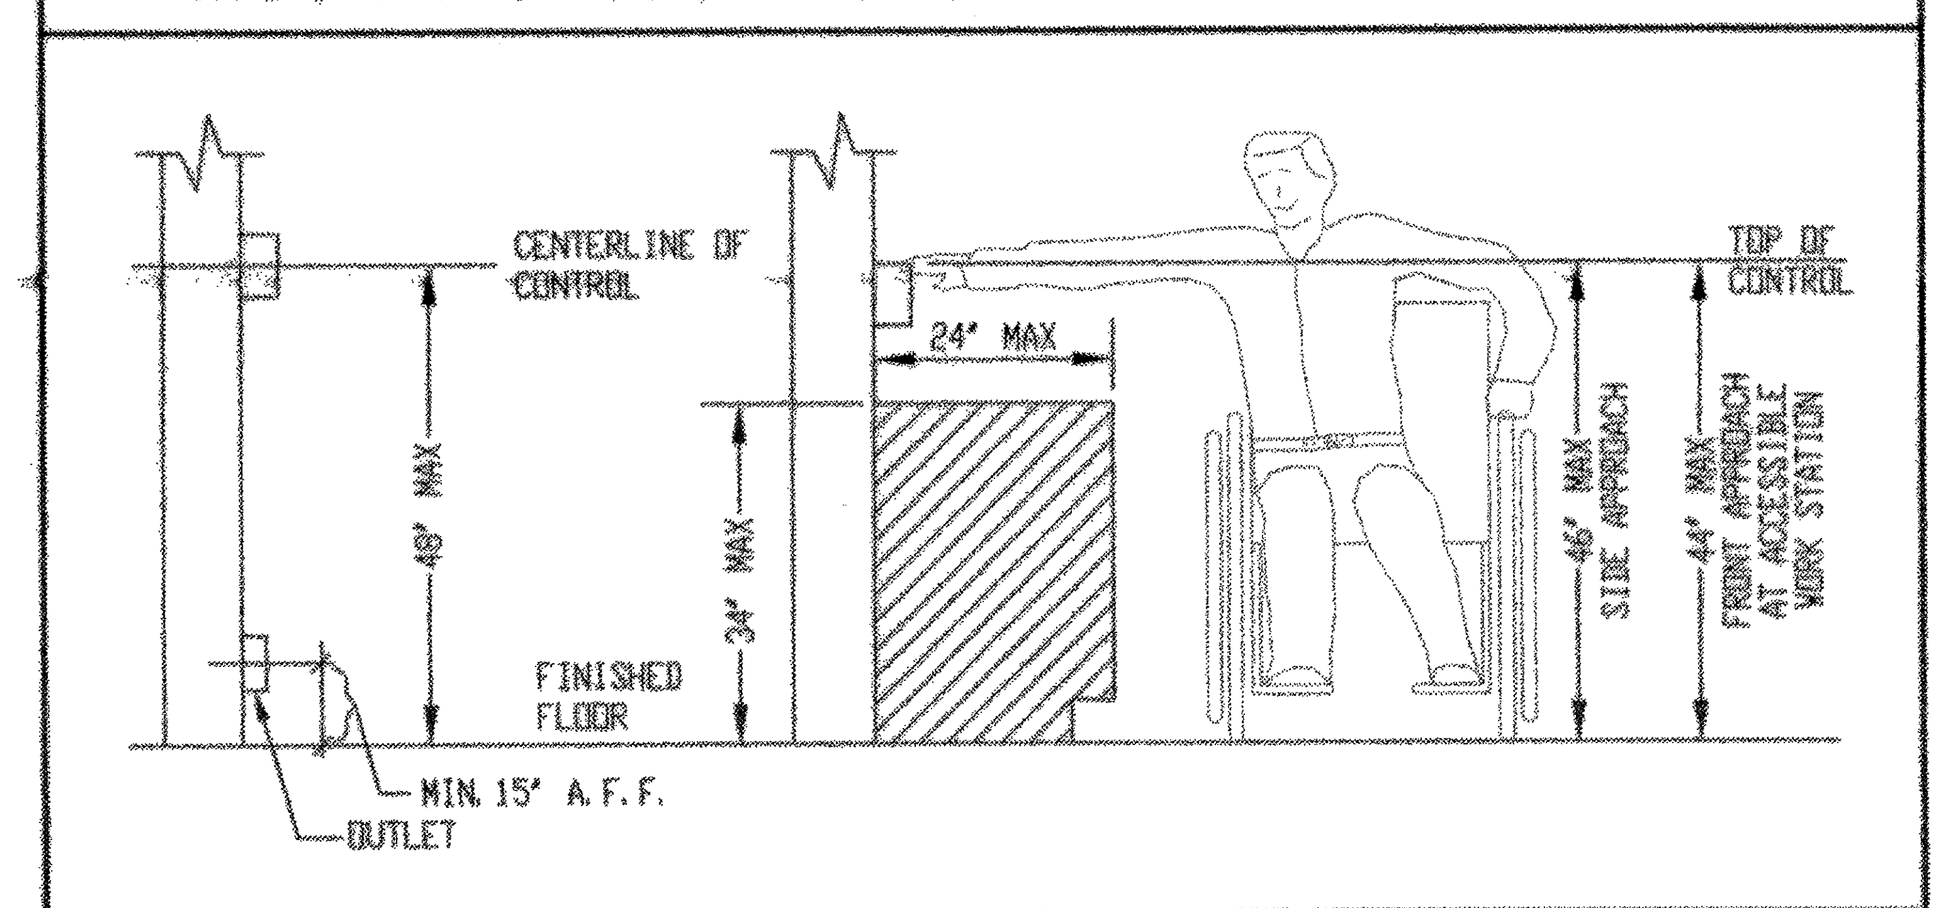

FIRE ALARM NOTE:

FIRE ALARM SUBMITTAL IS A COMPLETE PLAN SUBMITTAL IN ACCORDANCE WITH DSA POLICY 95-03(FLS) FEBRUARY 1, 1995

REFER TO SHEET E0.3 FOR FIRE ALARM SYMBOL LIST

SYMBOL LIST

(ALL SYMBOLS NOT NECESSARILY USED ON THESE DRAWINGS)
ALL SYMBOL DESCRIPTIONS ARE SUBJECT TO MODIFICATION AS NOTED ON THE DRAWINGS. VERIFY EXACT LOCATIONS AND HEIGHTS OF OUTLETS WITH ARCHITECTURAL INTERIOR ELEVATIONS PRIOR TO ROUGH-IN.

A.F.F.	ABOVE FINISH FLOOR
A.F.G.	ABOVE FINISH GRADE
AWG	AMERICAN WIRE GAUGE
AMP, A	AMPERE
A.I.C.	AMPERES INTERRUPTING CAPACITY (SYMMETRICAL)
AF/AT	AMP FRAME, AMP TRIP
AS/AF	AMP SWITCH, AMP FUSE
CIRC., CKT.	CIRCUIT
CB	CIRCUIT BREAKER
C	CONDUIT
C.O.	CONDUIT ONLY.
CONN	CONNECTED
CPT	CONTROL POWER TRANSFORMER
CLCB	CURRENT LIMITING CIRCUIT BREAKER
CLF	CURRENT LIMITING FUSE
CT	CURRENT TRANSFORMER
EMCS	ENERGY MANAGEMENT CONTROL SYSTEM
DIA	DIAMETER
EMT	ELECTRICAL METALLIC TUBING
EWC	ELECTRIC WATER COOLER
EF	EXHAUST FAN
E	EXISTING EQUIPMENT TO BE REUSED
FT or '	FEET
FA	FIRE ALARM
FLA	FULL LOAD AMPS
GFI	GROUND FAULT INTERRUPTER.
GRD	GROUND
HVAC	HEATING, VENTILATING AND AIR CONDITIONING
H.,W.,D.,L.	HEIGHT, WIDTH, DEPTH, LENGTH
HID	HIGH INTENSITY DISCHARGE
HP	HORSEPOWER
HPS	HIGH PRESSURE SODIUM
IN. or "	INCHES
IG	ISOLATED GROUND
J-BOX	JUNCTION BOX
KVA	KILOVOLT AMPERES
KW	KILOWATT
LCL	LONG CONTINUOUS LOAD
LTG, LTS	LIGHTING
LPS	MAIN LUGS ONLY
MLO	MAIN CIRCUIT BREAKER
MH	METAL HALIDE
MCC	MOTOR CONTROL CENTER
MCM	THOUSAND CIRCULAR MILS
MTD	MOUNTED
NEC	NATIONAL ELECTRICAL CODE
NC	NORMALLY CLOSED
NO	NORMALLY OPENED
NF	NON-FUSED
NIC	NOT IN CONTRACT
NO. or #	NUMBER
PRIMARY	OVER 600 VOLTS
PH. or Φ	PHASE
PROVIDE	FURNISH, INSTALL AND CONNECT.
PA	PUBLIC ADDRESS
REC, RECEPT	RECEPTACLE
RGS	RIGID GALVANIZED STEEL
SECONDARY	600 VOLTS AND LESS
TV	TELEVISION
TYP	TYPICAL
U.N.O.	UNLESS NOTED OTHERWISE
V	VOLTS
VA	VOLT AMPERES
WP	WEATHERPROOF
W	WIRE
Y	WYE CONFIGURATION
+45"	MOUNTING HEIGHT TO CENTER LINE OF DEVICE FROM FINISH FLOOR OR EXTERIOR GRADE
1P 2P 3P	SINGLE POLE DOUBLE POLE TRIPLE POLE

- CONDUIT, INSTALLED CONCEALED IN OR UNDER FLOOR OR BELOW GRADE, 3/4" CONDUIT MINIMUM.
- CONDUIT, INSTALLED EXPOSED.
- B-5, 7, 9 — HOMERUN TO PANEL 'B' FOR CIRCUITS 5, 7, 9 WITH COMMON NEUTRAL.
- UNDERGROUND CONDUIT STUBOUT, STUB 5'-0" FROM BUILDING OR WALKWAY, CAP, MARK AND RECORD.
- TELEPHONE OUTLET, ON FLUSH WALL MOUNTED OUTLET BOX +18", WITH DESK MOUNTED DEVICE.
- TELEPHONE OUTLET, ON FLUSH WALL MOUNTED OUTLET BOX +45", WITH WALL MOUNTED DEVICE.
- P — TELEPHONE OUTLET, ON FLUSH FLOOR MOUNTED OUTLET BOX, 'P' INDICATES PEDESTAL TYPE ON FLUSH FLOOR MOUNTED OUTLET BOX WITH DESK MOUNTED TELEPHONE.
- SPEAKER, HOUSING AND GRILLE, SURFACE MOUNTED ON FLUSH CEILING MOUNTED OUTLET BOX.
- SPEAKER, HOUSING & GRILLE, FLUSH CEILING MOUNTED.
- SPEAKER, HOUSING & GRILLE, SURFACE MOUNTED ON FLUSH WALL MOUNTED OUTLET BOX, +90".
- SPEAKER, HOUSING & GRILLE, FLUSH WALL MOUNTED, +90".
- CLOCK OUTLET, ON FLUSH WALL MOUNTED OUTLET BOX, +90", WITH CLOCK AND INTEGRAL CLASS PASSING BUZZER.
- COMBINATION CLOCK/SPEAKER ON FLUSH WALL MOUNTED BACKBOX, +90".
- TELEVISION OUTLET, ON FLUSH WALL MOUNTED OUTLET BOX, +18", WITH 1" CONDUIT TO ACCESSIBLE CEILING SPACE.
- P — TELEVISION OUTLET, ON FLUSH FLOOR MOUNTED OUTLET BOX. 'P' INDICATES PEDESTAL TYPE, ON FLUSH FLOOR MOUNTED OUTLET BOX.
- TELEVISION OUTLET, ON FLUSH CEILING MOUNTED OUTLET BOX.
- C — COMPUTER/DATA PROCESSING OUTLET, ON FLUSH WALL MOUNTED OUTLET BOX +18", WITH 1" CONDUIT TO ACCESSIBLE CEILING SPACE. 'C' INDICATES HORIZONTAL IN FLUSH WALL MOUNTED OUTLET BOX, +6" ABOVE COUNTER SPLASH.
- INTRUSION DETECTION SYSTEM MOTION SENSOR, ON FLUSH CEILING MOUNTED OUTLET BOX.
- INTRUSION DETECTION SYSTEM KEY PAD, ON FLUSH CEILING MOUNTED OUTLET BOX, +45".
- DOOR ALARM CONTACT, FLUSH MOUNTED IN DOOR AND DOOR FRAME.
- F — FIRE ALARM SYSTEM - 3/4"C. WITH FIRE ALARM SYSTEM CONDUCTORS AS SPECIFIED.
- T1 — TELEPHONE SYSTEM 3/4"C. WITH ONE SET OF CONDUCTOR AS SPECIFIED.
  - T2 - 1"C. WITH TWO SETS OF CONDUCTORS AS SPECIFIED.
  - T3 - 1 1/4"C. WITH THREE SETS OF CONDUCTORS AS SPECIFIED
  - T4 - 1 1/2"C. WITH FOUR SETS OF CONDUCTORS AS SPECIFIED.
- P — PUBLIC ADDRESS SYSTEM - 3/4"C., WITH CONDUCTORS AS SPECIFIED.
- C — CLOCK SYSTEM - 3/4"C., WITH CONDUCTORS AS SPECIFIED.
- TV — TELEVISION SYSTEM - 3/4"C., WITH CONDUCTORS AS SPECIFIED.
- ID — INTRUSION DETECTION SYSTEM - 3/4"C., WITH CONDUCTORS AS SPECIFIED.
- D — COMPUTER/DATA PROCESSING SYSTEM - 3/4"C., WITH CONDUCTORS AS SPECIFIED.
  - D2 - 1" C., WITH CONDUCTORS AS SPECIFIED.
  - D3 - 1 1/4"C., WITH CONDUCTORS AS SPECIFIED.
  - D4 - 2"C., WITH CONDUCTORS AS SPECIFIED.
- E — EXISTING RACEWAY.
- PUSH-BUTTON STATION, RED, MUSHROOM TYPE, ON FLUSH WALL MOUNTED OUTLET BOX, +45".
- CS — COMBINATION CLOCK SYSTEM & CLASS PASSING SYSTEM 3/4"C., WITH CONDUCTORS AS REQUIRED FOR CLOCK SYSTEM & 3/4"C. WITH CONDUCTORS AS REQUIRED FOR CLASS PASSING BELL SYSTEM.
- CP — CLASS PASSING BELL SYSTEM-3/4"C. WITH CONDUCTORS AS REQUIRED.
- EMC — ENERGY MANAGEMENT CONTROL- 1/2"C.O.
- R — 'R' INDICATES RECESSED FLOOR BOX WITH MULTISERVICE FITTINGS, DOUBLE DUPLEX, TELEPHONE AND DATA OUTLETS.
- COMPUTER/DATA OUTLET, WITH A SINGLE OUTLET CONNECTOR, ON FLUSH WALL MOUNTED OUTLET BOX +18". PROVIDE 1" CONDUIT TO ACCESSIBLE CEILING SPACE UNLESS NOTED OTHERWISE. PROVIDE ONE (1) DATA NETWORK CABLE AS SPECIFIED FROM OUTLET TO THE RESPECTIVE IDF/MDF.
- COMPUTER/DATA OUTLET, WITH A DUPLEX OUTLET CONNECTOR, ON FLUSH WALL MOUNTED OUTLET BOX +18". PROVIDE 1" CONDUIT TO ACCESSIBLE CEILING SPACE UNLESS NOTED OTHERWISE. PROVIDE TWO (2) DATA NETWORK CABLES AS SPECIFIED FROM OUTLET TO THE RESPECTIVE IDF.
- DATA OUTLET, WITH A SINGLE UNIVERSAL OUTLET CONNECTOR, ON FLUSH FLOOR OUTLET BOX. PROVIDE 1" CONDUIT TO THE RESPECTIVE IDF/MDF. PROVIDE ONE (1) DATA NETWORK CABLE AS SPECIFIED FROM OUTLET TO THE RESPECTIVE IDF/MDF.
- DATA OUTLET, WITH A DOUBLE UNIVERSAL OUTLET CONNECTOR, ON FLUSH FLOOR OUTLET BOX. PROVIDE 1" CONDUIT TO ACCESSIBLE CEILING SPACE. PROVIDE TWO (2) DATA NETWORK CABLES AS SPECIFIED FROM OUTLET TO THE RESPECTIVE IDF.
- PROJECTOR OUTLET ON FLUSH WALL MOUNTED OUTLET BOX, +18".
- PROJECTOR OUTLET, ON FLUSH FLOOR MOUNTED OUTLET BOX.
- TECHNICAL SYSTEM OUTLET, ON FLUSH WALL MOUNTED OUTLET BOX, +18".
- TECHNICAL SYSTEM OUTLET, ON FLUSH FLOOR MOUNTED OUTLET BOX.
- ASSISTIVE LISTENING SYSTEM EMITTER, SURFACE MOUNTED ON FLUSH MOUNTED OUTLET BOX. MOUNTING HEIGHT AS INDICATED ON THE ELECTRICAL DRAWINGS.
- CLASS PASSING BELL ON FLUSH WALL MOUNTED OUTLET BOX +96".
- TANDEM WIRING HARNESS.
- AUDIO/VIDEO OUTLET AS PER DETAIL A ON SHEET E0.2 WITH THREE (3) RJ-45 UNIVERSAL OUTLET CONNECTORS FOR AUDIO AND VIDEO ON FLUSH WALL MOUNTED OUTLET BOX +18" U.N.O. PROVIDE 1"C. STUBBED INTO ACCESSIBLE CEILING SPACE. PROVIDE THREE (3) CATEGORY-5 COMPUTER/DATA CABLES FROM THE RESPECTIVE UNIVERSAL OUTLET CONNECTOR THROUGH THE SAME CONDUIT. CONCEALED ABOVE THE CEILING, TO TV OUTLET LOCATED IN THE SAME ROOM.
- CONNECTED TO SOLID GROUND REFERENCE POINT
- DELTA CONFIGURATION
- C / E-2 — DETAIL CALLOUT, 'C' INDICATES DETAIL, 'E-2' INDICATES DRAWING WHERE DETAIL OCCURS.
- EF / 1 — MECHANICAL EQUIPMENT CALLOUT. REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATION AND REQUIREMENTS OF MECHANICAL EQUIPMENT.
- 1 — PLAN NOTE CALLOUT. REFER TO CORRESPONDING NOTE ON DRAWING WHERE CALLOUT OCCURS.
- FLUORESCENT LIGHTING FIXTURE, RECESS MOUNTED, WITH OUTLET BOX.
- FLUORESCENT LIGHTING FIXTURE, SURFACE OR PENDANT MOUNTED ON FLUSH MOUNTED OUTLET BOX.
- FLUORESCENT STRIP OR INDUSTRIAL LIGHTING FIXTURE, SURFACE, CHAIN OR PENDANT MOUNTED ON FLUSH MOUNTED OUTLET BOX.
- LIGHTING FIXTURE, SURFACE OR PENDANT MOUNTED, ON FLUSH CEILING MOUNTED OUTLET BOX.
- LIGHTING FIXTURE, RECESS MOUNTED, WITH OUTLET BOX.
- LIGHTING FIXTURE, SURFACE OR FLUSH MOUNTED AS INDICATED ON FIXTURE SCHEDULE, ON WALL MOUNTED OUTLET BOX, +90". STEM INDICATES WALL MOUNTED OUTLET BOX, TYPICAL.
- OUTLET ON EMERGENCY OR NIGHT LIGHTING CIRCUIT.
- LIGHTING FIXTURE WITH LAMPS ON NORMAL AND EMERGENCY LIGHTING CIRCUITS, PROVIDE SEPARATE LAMP BALLASTS AS REQUIRED.
- LIGHTING FIXTURE RECESSED MOUNTED WITH OUTLET BOX AND REMOTE MOUNTED JUNCTION BOX CONCEALED ABOVE ACCESSIBLE CEILING. PROVIDE FLEXIBLE CONDUIT CONNECTION 6 FT. MAXIMUM LENGTH, 1/2" DIAMETER MINIMUM, FROM JUNCTION BOX TO FIXTURE OUTLET. PROVIDE CONDUCTORS IN CONDUIT, QUANTITY AS REQUIRED FOR INDICATED CIRCUITS AND SWITCHING CONTROLS, #12 (AWG) MINIMUM.
- EXIT SIGN SINGLE FACE, ON FLUSH CEILING MOUNTED OUTLET BOX. ARROW INDICATES DIRECTIONAL ARROW ON EXIT SIGN FACE. REFER TO ARCHITECTURAL DRAWINGS FOR PHOTOLUMINESCENT, LOW LEVEL EXIT AND PATHWAY MARKINGS.
- EXIT SIGN DOUBLE FACE, ON FLUSH CEILING MOUNTED OUTLET BOX. REFER TO ARCHITECTURAL DRAWINGS FOR PHOTOLUMINESCENT, LOW LEVEL EXIT AND PATHWAY MARKINGS.
- EXIT SIGN, ON FLUSH WALL MOUNTED OUTLET BOX, +90". REFER TO ARCHITECTURAL DRAWINGS FOR PHOTOLUMINESCENT, LOW LEVEL EXIT AND PATHWAY MARKINGS.
- 2 / 100 — FIXTURE SCHEDULE DESIGNATION: '2' INDICATES FIXTURE TYPE, '100' INDICATES FIXTURE TOTAL WATTAGE.
- S 2, P / a, b — SINGLE POLE TOGGLE SWITCH, ON FLUSH WALL MOUNTED OUTLET BOX, +45". INSTALL MULTIPLE SWITCHES UNDER COMMON COVER PLATE. SUBSCRIPT OR SUPERSCRIPT AT SWITCH SYMBOL INDICATES THE FOLLOWING:
  - 2 - DOUBLE POLE; 4 - FOUR WAY; M - MANUAL MOTOR STARTERS
  - 3 - THREE WAY; P - PILOT LIGHT; K - KEY OPERATED
  - R - SPDT MOMENTARY CONTACT RELAY SWITCH; V - VAPOR PROOF
  - a, b, c, d, ETC. - MULTIPLE SWITCHES WITH IDENTIFICATION OF OUTLET CONTROLLED.
- OS — OCCUPANCY MOTION SENSOR ON FLUSH CEILING MOUNTED OUTLET BOX.
- OS — OCCUPANCY MOTION SENSOR ON FLUSH WALL MOUNTED OUTLET BOX, +96".
- OCCUPANCY MOTION SENSOR SWITCH, ON FLUSH WALL MOUNTED OUTLET BOX, +45".
- DUPLEX CONVENIENCE RECEPTACLE VERTICAL ON FLUSH WALL MOUNTED OUTLET BOX, +18". STEM INDICATES WALL MOUNTED OUTLET BOX, TYPICAL.
- DUPLEX CONVENIENCE RECEPTACLE HORIZONTAL ON FLUSH WALL MOUNTED OUTLET BOX, +6" ABOVE COUNTER SPLASH.
- DUPLEX CONVENIENCE RECEPTACLE SPLIT WIRED, ON FLUSH WALL MOUNTED OUTLET BOX, +18".
- DOUBLE DUPLEX (FOUR-PLEX) CONVENIENCE RECEPTACLE ON ONE FLUSH WALL MOUNTED OUTLET BOX +18".
- SINGLE RECEPTACLE, NEMA CONFIGURATION PER EQUIPMENT MANUFACTURER REQUIREMENTS, ON FLUSH WALL MOUNTED OUTLET BOX, +18".
- DUPLEX CONVENIENCE RECEPTACLE WITH INTERNAL GROUND FAULT INTERRUPTER, VERTICAL ON FLUSH WALL MOUNTED OUTLET BOX +18".
- DUPLEX CONVENIENCE RECEPTACLE WITH INTERNAL GROUND FAULT INTERRUPTER, HORIZONTAL ON FLUSH WALL MOUNTED OUTLET BOX, +6" ABOVE COUNTER SPLASH.
- WP — DUPLEX CONVENIENCE RECEPTACLE, WITH INTERNAL GROUND FAULT INTERRUPTER, IN FLUSH WALL MOUNTED ENCLOSURE WITH HINGED DOOR, LOCK AND KEY, +18".
- WP — DUPLEX CONVENIENCE RECEPTACLE, WITH INTERNAL GROUND FAULT INTERRUPTER, ON FLUSH WALL MOUNTED OUTLET BOX WITH SPRING DOOR COVER, +18".
- P — DUPLEX CONVENIENCE RECEPTACLE ON FLUSH FLOOR MOUNTED OUTLET BOX. 'P' INDICATES PEDESTAL TYPE ON FLUSH FLOOR MOUNTED OUTLET BOX.
- DUPLEX CONVENIENCE RECEPTACLES FLUSH FLOOR MOUNTED OUTLET BOX.
- DUPLEX CONVENIENCE RECEPTACLE, ON FLUSH CEILING MOUNTED OUTLET BOX.
- JUNCTION BOX, FLUSH WALL MOUNTED, +18".
- JUNCTION BOX CONCEALED ABOVE ACCESSIBLE CEILING.
- INDICATES CONNECTION TO EQUIPMENT AS REQUIRED, TYPICAL.
- JUNCTION BOX, FLUSH IN FLOOR.
- THERMOSTAT ON FLUSH WALL MOUNTED OUTLET BOX, REFER TO MECHANICAL DRAWINGS FOR HEIGHT AND LOCATION.
- A / E-1 — PANELBOARD, ADJACENT LINE INDICATES PANEL FRONT. ADJACENT BALLOON INDICATES PANEL DESIGNATION 'A', SEE DRAWING E-1 FOR PANEL SCHEDULE.
- TERMINAL CABINET OR EQUIPMENT CABINET. ADJACENT LINE INDICATES CABINET FRONT.
- A / E-1 — FLOOR STANDING SWITCHGEAR ADJACENT BALLOON INDICATES EQUIPMENT DESIGNATION 'DDM', SEE DRAWING E-1 FOR SINGLE LINE DIAGRAM AND/OR SCHEDULE.
- CIRCUIT BREAKER STATIONARY (NON-DRAWOUT), SECONDARY VOLTAGE.
- FUSIBLE SWITCH AND FUSE DEVICE. STATIONARY SWITCH (NON- DRAWOUT) REMOVABLE FUSES, SECONDARY VOLTAGE.
- CIRCUIT BREAKER WITH ZERO SEQUENCE GROUND FAULT RELAY SYSTEM.
- TRANSFORMER; KVA, LINE AND LOAD VOLTAGE RATINGS AS INDICATED.
- FUSED SAFETY SWITCH (DISCONNECT), HORSE POWER RATED. MOUNT ON WALL +45", OR ON EQUIPMENT +36". PROVIDE SWITCH AND FUSES SIZED PER EQUIPMENT MANUFACTURER REQUIREMENTS.
- MOTOR CONNECTION. PROVIDE FUSED SAFETY SWITCH (DISCONNECT), HORSE POWER RATED, WALL MOUNTED, +45" OR EQUIPMENT MOUNTED, +36". PROVIDE SWITCH AND FUSES SIZED PER EQUIPMENT MANUFACTURER REQUIREMENTS.
- CONDUIT, INSTALLED CONCEALED IN WALL OR IN CEILING SPACE.
  - 1/2" C - 2 #12, 1#12GRD; 3/4" C - 6 #12, 1#12 GRD
  - 1/2" C - 3 #12 1#12GRD; 1" C - 7 #12, 1#12 GRD
  - 3/4" C - 4 #12, 1#12GRD; 1" C - 8 #12, 1#12 GRD
  - 3/4" C - 5 #12, 1#12GRD; 1 1/4" C - 9 #12, 1#12 GRD

San Gabriel Unified School District
408 Junipero Serra
San Gabriel, CA 91776

IBI GROUP
ARCHITECTS ENGINEERS PLANNERS

ARCHITECT:
IBI Group
18401 Von Karman Avenue, Suite 110
Irvine, California 92612
Phone 949-833-5588
Fax 949-833-5511

STRUCTURAL ENGINEER:
Martin, Chow & Nakabara, Inc.
3185-C Airway Avenue
Costa Mesa, CA 92626
Phone 714-979-3003
Fax 714-979-3259

MECHANICAL ENGINEER:
Fundament & Associates
26 Executive Park #100
Irvine, CA 92614
Phone 949-251-1131
Fax 949-251-9434

ELECTRICAL ENGINEER:
FBA
3420 Irvine Avenue, Suite 200
Newport Beach, CA 92660-3189
Phone 949-852-9995
Fax 949-852-1657

CIVIL ENGINEER:
Snipes-Dye Associates
8348 Center Drive, Suite G
La Mesa, CA 91942-2910
Phone 619-697-9234
Fax 619-460-2033

LANDSCAPE ENGINEER:
IBI Group
10 Exchange Place- Suite 112
Salt Lake City UT 84111 USA
Phone 801-532-4233
Fax 801-532-4231

FBA # 888.170
FBA Engineering
Consulting Electrical Engineers
3420 Irvine Avenue Suite 200
Newport Beach, California 92660-3189
TEL: 949 852 9995 FAX: 949 852 1657
EMAIL: fba@fbaengineering.net

REGISTERED PROFESSIONAL ENGINEER STEPHEN R. ZAJICEK No. E 10372 Exp. 09-30-10 ELECTRICAL STATE OF CALIFORNIA

IDENTIFICATION STAMP
DIV. OF THE STATE ARCHITECT
OFFICE OF REGULATION SERVICES
03-112620
AC FLS SS
DATE

LICENSED ARCHITECT KEVIN S. FLEMING NO. C26668 09-31-11 RENEWAL DATE STATE OF CALIFORNIA

This drawing, as an instrument of service, is the property of the Architect and may not be reproduced without their permission and unless the reproduction carries their name. All design and other information show on this drawing are for the use on the specified project only and shall not be used otherwise without written permission of the Architect.

Written dimensions shall have precedence over scaled dimensions. Contractors shall verify and be responsible for all dimensions and conditions on the job and the Architect shall be informed of any variations from the dimensions and conditions show on the drawing. Shop drawings shall be submitted to the Architect for approval before proceeding with fabrication.

Del Mar High School
312 Del Mar Ave
San Gabriel, CA 91776

SYMBOL LIST, NOTES & DETAILS

Project Number	20318
Date	FEBRUARY, 2010
Drawn By	JBM
Checked By	RR

E0.1

Scale