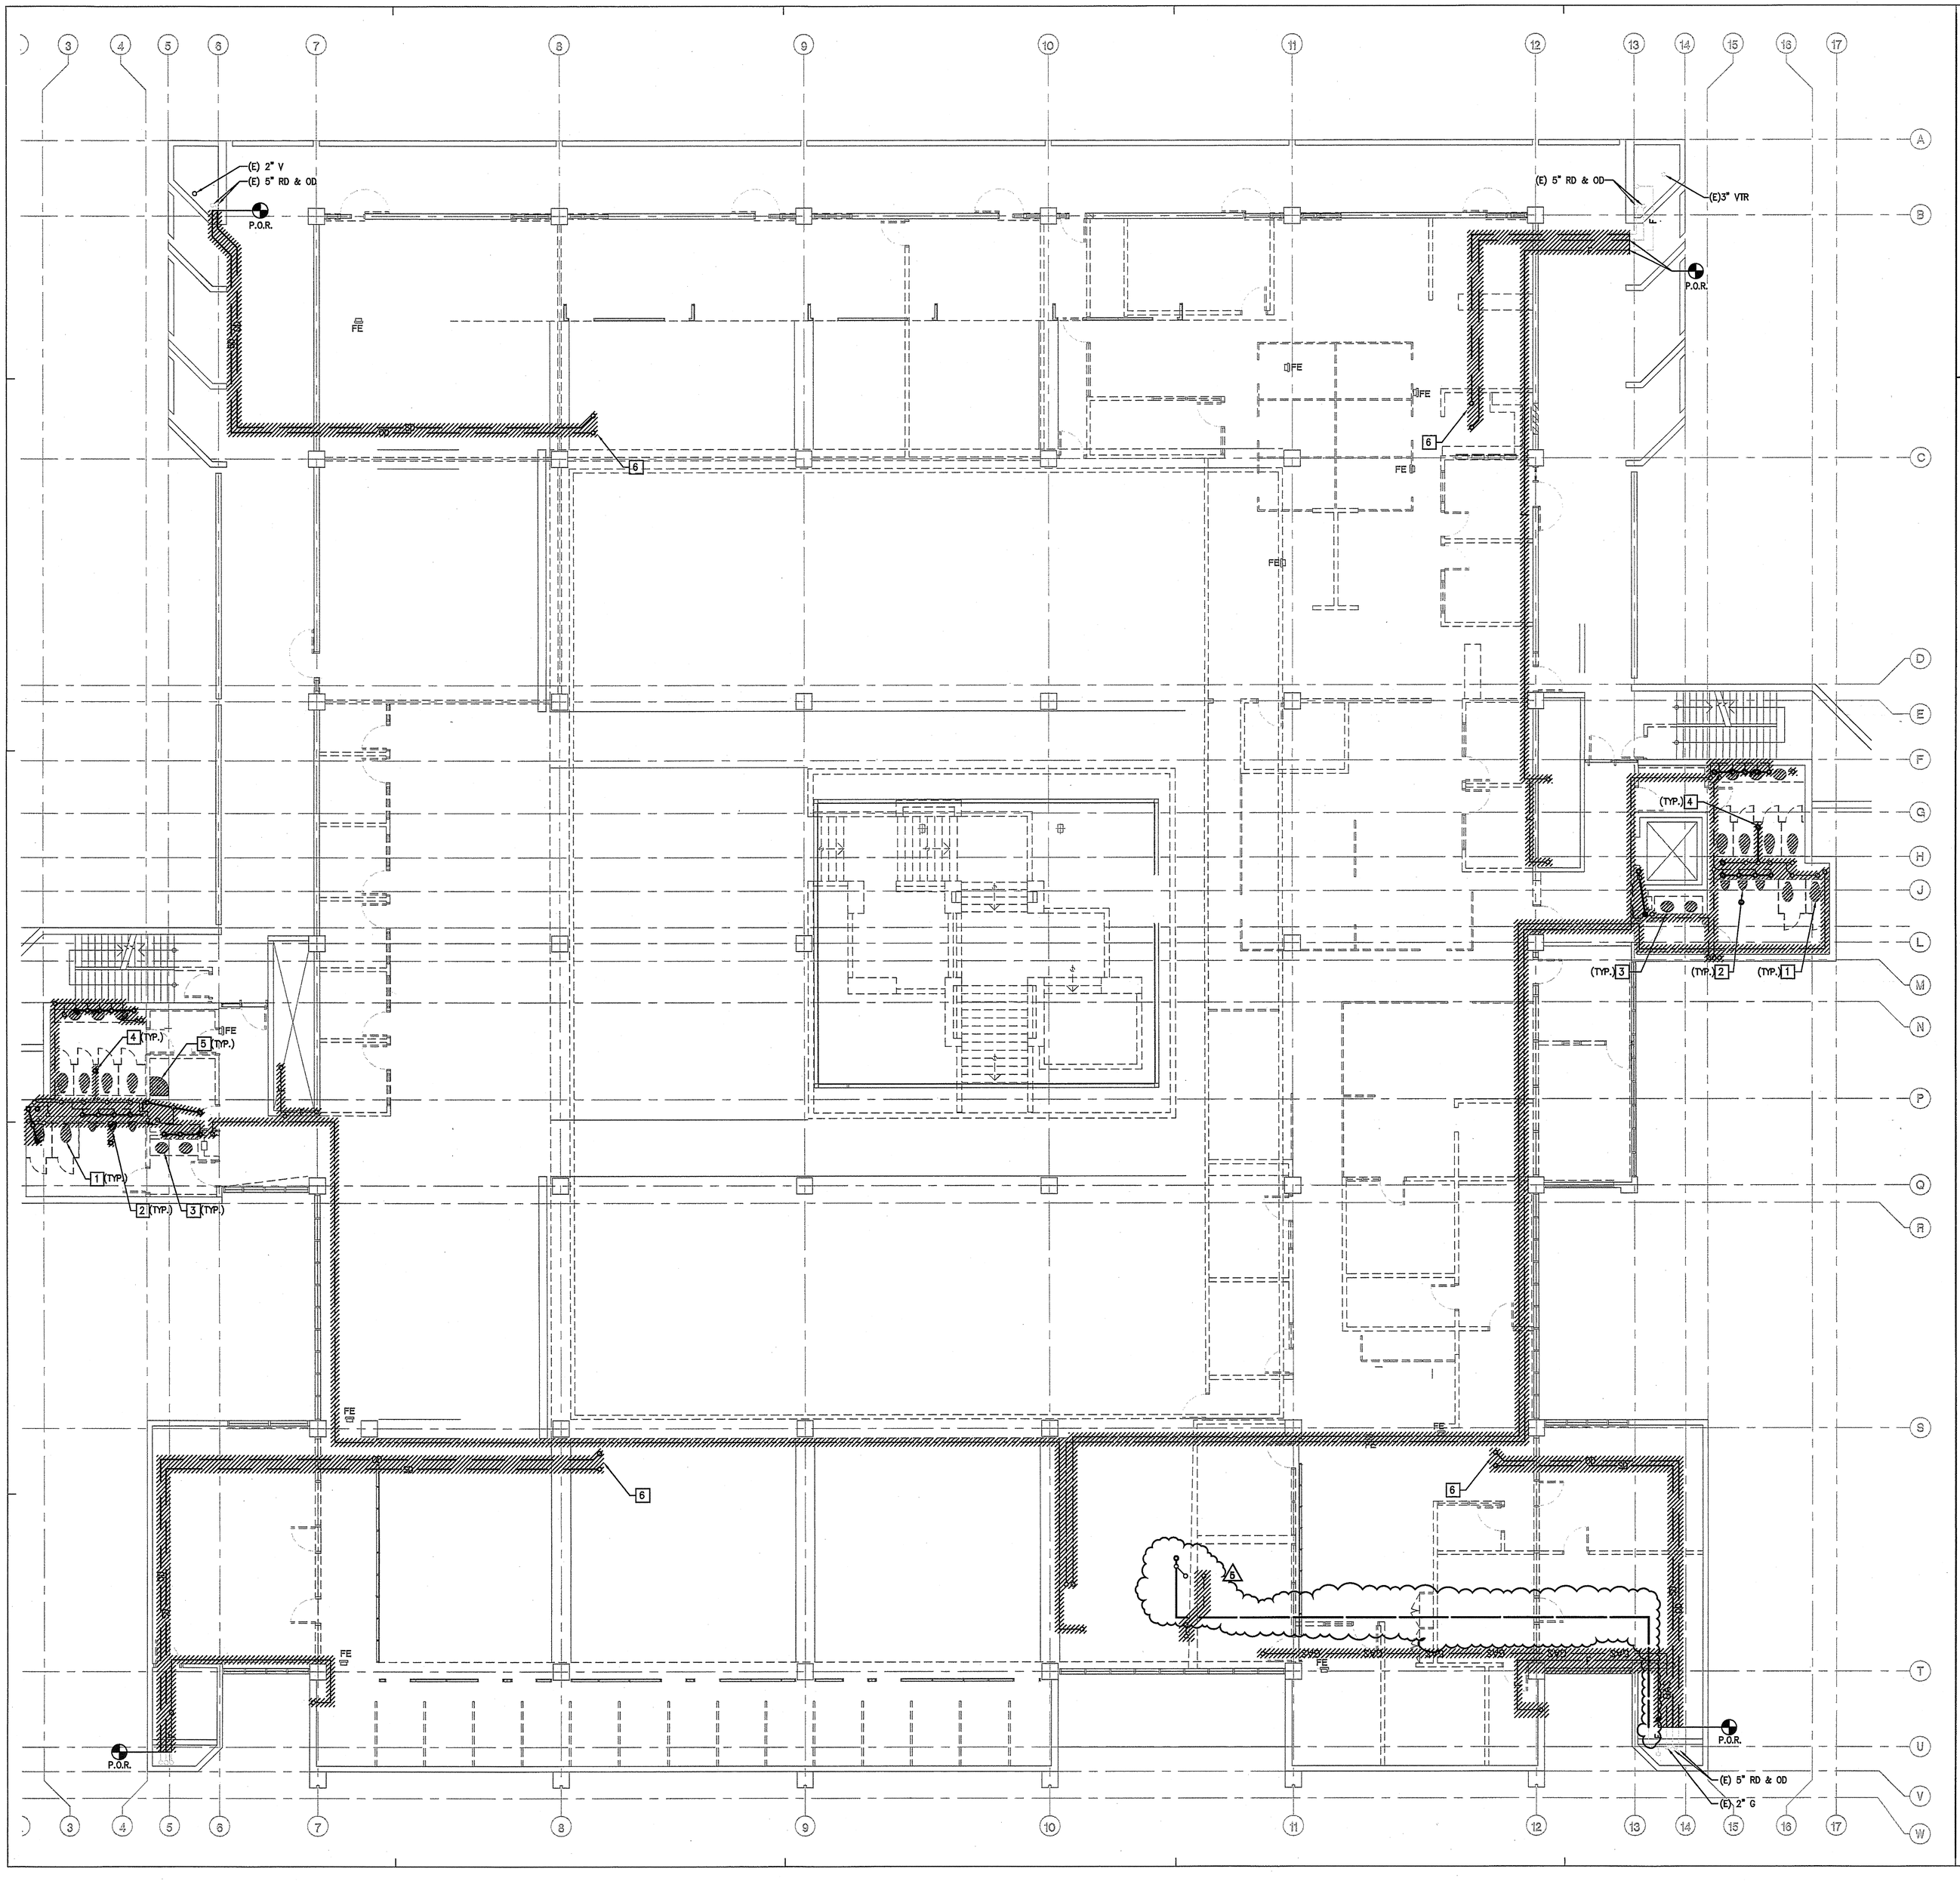

DEMOLITION GENERAL NOTES

1. REMOVE EXISTING CW, HW, VENT AND WASTE PIPING SERVING FIXTURES THAT WILL BE DEMOLISHED, AND AS SHOWN. REUSE EXISTING CW, HW, VENT, AND WASTE PIPING TO SERVE NEW FIXTURE IN SAME LOCATION AS EXISTING.
2. ALL PIPING SHOWN ON PLANS LIGHT SHADED AND NOT INDICATED OR SHOWN TO BE REMOVED, SHALL BE EXISTING TO REMAIN UNLESS NOTED OTHERWISE. (U.N.O.)
3. REMOVE EXISTING WASTE PIPING BELOW SLAB IN CONFLICT WITH NEW WASTE PIPING INSTALLATION. PROVIDE NECESSARY SAW CUTTING FOR REMOVAL AND NEW INSTALLATION. VERIFY AND LOCATE EXISTING WASTE PIPING PRIOR TO COMMENCEMENT OF WORK.

DEMOLITION KEYNOTES

1. REMOVE EXISTING WATER CLOSET AND ALL ASSOCIATED PIPING.
2. REMOVE EXISTING URINAL AND ALL ASSOCIATED PIPING.
3. REMOVE EXISTING LAVATORY AND ALL ASSOCIATED PIPING.
4. REMOVE EXISTING FLOOR DRAIN AND ALL ASSOCIATED PIPING.
5. EXISTING FIRE PROTECTION PIPING TO REMAIN.
6. REMOVE EXISTING 5" RD AND OD PIPING UP TO ROOF.

SADDLEBACK COLLEGE

gkkworks
2355 Main Street Suite 220
Irvine | CA 92614
949 250 1500
949 955 2708 fax

Architect Seal

Consultant and Seal

REGISTERED PROFESSIONAL ENGINEER
CHRISTOPHER J. FUNDAMENT
No. 24911
Exp. 9-30-10
MECHANICAL
STATE OF CALIFORNIA

Fundament & Associates Inc.
Engineering Consultants
26 Executive Park, Suite 100, Irvine CA 92614 (949) 251-1131

Agency Approval

No.	Date	Revision/Issue
5	11-20-09	ADDENDUM NO. 05

Project Name

JAMES B. UTT MEMORIAL LEARNING RESOURCE CENTER RENOVATION
28000 Marguerite Parkway
Mission Viejo, California 92692

Checked By | Drawn By

Sheet Title

PLUMBING
THIRD FLOOR
DEMOLITION PLAN

Sheet Number

PD2.03

Project Number 04-111 | Scale 1/8"=1'-0"

©2009 gkkworks, All Rights Reserved
NO PART OF THE CONTENTS OF THIS DOCUMENT MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN PERMISSION OF GKKWORKS.

J:\7113-Saddleback Library\Plumb\7113-PD203.dwg 11/23/2009

8/03/17 7:-51697 P1 S2 - R C CONSTRUCTION SERVICES - PG 184 OF 236 (P1 S2) 1 SET.TIF - 2/3/2010 - 15:34