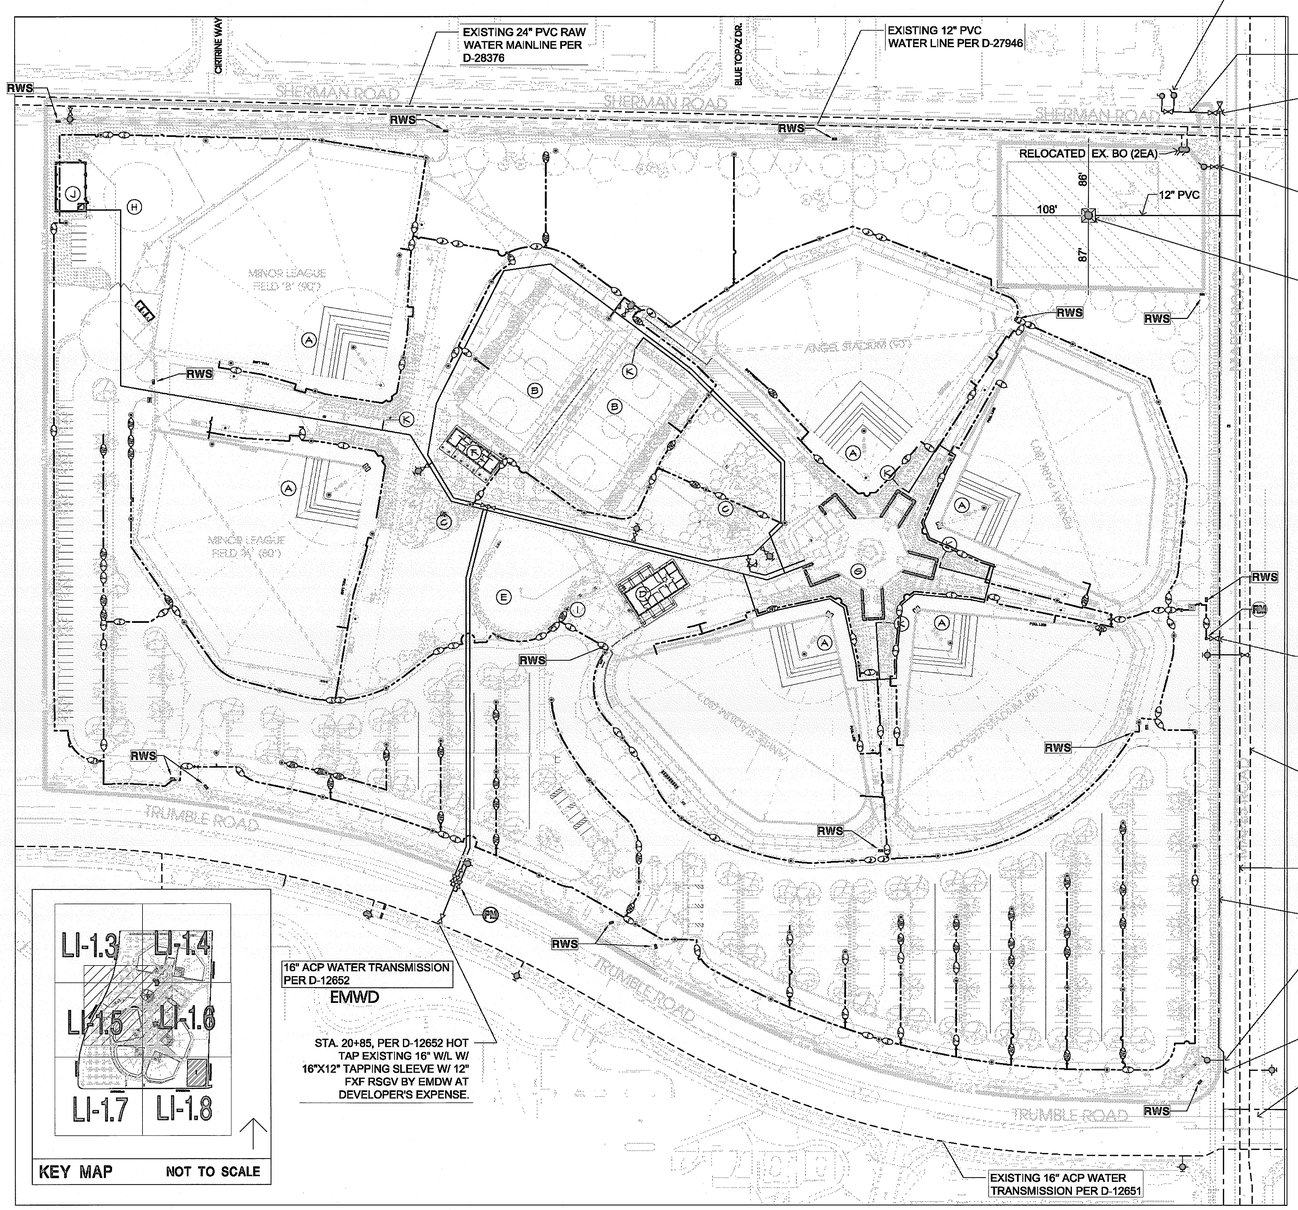

STA. 10+81.50 PROPOSED 12"x12"x6" TEE, 12" ADAPTOR (S), 12" RSGV (N), 12" BLIND FLANGE (N), 1" AVAR (N) PER PB-8, AND 6" B.O. (E) PER PA-1

PROPOSED 12" RECYCLED WATER MAINLINE

STA. 23+44.77 MAPES=STA. 10+15.41 SHERMAN PROPOSED 12"x12"x12" TEE, 12" RSGV (N), AND 12" RSGV WITH BLD FLG. (E)

STA. 22+55.00 PROPOSED 12"x12"x6" TEE, 6" RSGV, AND 6" B.O. PER PA-1

WATER WELL MADES & SHERMAN DESALTER WELL

STA. 16+40.00 PROPOSED 12"x12"x8" TEE, 8" RSGV (N), 8" RECYCLED WATER SERVICE LINE, AND 4" LANDSCAPE METER PER PB-15

EXISTING 12" CML&C WATER MAIN PER D-983

EXISTING 24" PVC RAW WATER MAIN PER D-31295

PROPOSED 12" RECYCLED WATER MAINLINE

STA. 10+89.44 PROPOSED 12" R/W MAINLINE P.O.C. 12"x12"x6" TEE, RECONNECT EX. 6" B.O.

EXISTING 12" PVC RECYCLED WATER MAIN PER D-34177

EXISTING 8" PVC RECYCLED WATER MAIN PER D-34177B

EMWD Construction Note

EASTERN MUNICIPAL WATER DISTRICT REQUIRES THAT A PRE-CONSTRUCTION CONFERENCE BE SCHEDULED PRIOR TO ANY CONSTRUCTION BY CALLING THE EASTERN MUNICIPAL WATER DISTRICT FIELD ENGINEERING DEPARTMENT AT (951) 928-3777, EXTENSION 4830.

Omission Statement

THERE ARE NO , DECORATIVE FOUNTAINS, OUTDOOR EATING AREAS, OR WELLS ON THE SITE. DRINKING WATER FOUNTAINS, DESIGNATED OUTDOOR EATING AREAS, PLAY AREAS, RESTAURNTS & RESTROOMS SHALL BE PROTECTED AGAINST CONTACT WITH RECYCLED WATER SPRAY, MIST, OR RUN-OFF. THE POTABLE WATERLINE SUPPLYING THE DRINKING FOUNTAIN MUST HAVE A WARNING BLUE COLORED TAPE IDENTIFYING IT AS A POTABLE WATERLINE AND STATING "CAUTION: BURIED WATERLINE BELOW" INSTALLED OVER IT.

Potable and Recycled Water Separation Note

RECYCLED MAINLINE (CONSTANT PRESSURE) SHOWN DIAGRAMMATICALLY FOR CLARITY ONLY. ACTUAL LOCATION MUST PROVIDE A MINIMUM FOUR (4) FEET HORIZONTAL CLEARANCE BETWEEN ALL POTABLE AND CONSTANT PRESSURE RECYCLED WATERLINES. RECYCLED WATER MAINLINE SHOULD BE INSTALLED UNDER POTABLE WATERLINES AND MAINTAIN ONE (1) FOOT OF VERTICAL CLEARANCE. WHERE THE RECYCLED WATER CONSTANT PRESSURE LINE MUST BE INSTALLED ABOVE THE POTABLE WATERLINE, A FOUR (4) INCH MINIMUM VERTICAL CLEARANCE MUST BE MAINTAINED AND THE RECYCLED WATER PRESSURE LINE MUST BE INSTALLED IN A CONTINUOUS PVC CLASS 200 PIPE OR GREATER SLEEVE WHICH EXTENDS A MINIMUM OF TEN (10') FEET EACH SIDE OF THE POTABLE WATERLINE.

AREA LEGEND/DESCRIPTION:

DECOMPOSED GRANITE - INFIELD MIX
COVERED SOCCER AREA WITH SYNTHETIC TURF
CHILDREN'S PLAY AREA
ADMINISTRATION/ENTRY BUILDING
8 STATION BATTING CAGE
CONCESSSION/RESTROOM BUILDING
RESTAURANT/STADIUM CLUB BUILDING
MAINTENANCE AREA
MAIN ENTRY PLAZA
MAINTENANCE BUILDING
SITE DRINKING FOUNTAINS

AREA LEGEND/DESCRIPTION:

(A) DECOMPOSED GRANITE - INFIELD MIX
(B) COVERED SOCCER AREA WITH SYNTHETIC TURF
(C) CHILDREN'S PLAY AREA
(D) ADMINISTRATION/ENTRY BUILDING
(E) 8 STATION BATTING CAGE
(F) CONCESSSION/RESTROOM BUILDING
(G) RESTAURANT/STADIUM CLUB BUILDING
(H) MAINTENANCE AREA
(I) MAIN ENTRY PLAZA
(J) MAINTENANCE BUILDING
(K) SITE DRINKING FOUNTAINS

EMWD P.O.C. SEQUENCE

REFER TO IRRIGATION LEGEND FOR EQUIPMENT LEDGEND AND DISCRIPTION. REFER TO IRRIGATION DETAIL SHEET LI-2.3 DETAIL "D".

M — B — P — PB — TO IRRIGATION SYSTEM

LEGEND:

- RECYCLED WATER IRRIGATION MAINLINE
- Project Limit Line
- Proposed Potable Water Service Line (EMWD Maintained)
- Proposed Recycled Water Service Line (EMWD Maintained)
- Existing Potable Water Service Line (EMWD Maintained)
- Existing Recycled Water Service Line (EMWD Maintained)
- PM — Proposed Potable Water Meter (EMWD Maintained)
- RM — Proposed Recycled Water Meter (EMWD Maintained)
- Resilient Seat Gate Valve
- Blow Off
- Fire Hydrant
- AV & AR
- Water Well
- IRRIGATION GATE VALVE SEE LEGEND FOR DISCRIPTION

NOTE:
REFER TO SHEET LI-1.1 FOR IRRIGATION LEGEND

0' 40' 80' 160'

Underground Service Alert
Call: TOLL FREE
1-800-227-2600
TWO WORKING DAYS BEFORE YOU DIG

MOORE IACOFANO GOLTSMAN, INC.
801 HARBOR BLVD.
FULLERTON, CA 92832
TEL 714/871-3638
FAX 714/871-1188
www.migcom.com

DATE	BY	MARK	DESCRIPTION	APPR.	DATE
ENGINEER			REVISIONS	EMWD	

ON-SITE RECYCLED WATE APPROVAL BY:
EASTERN MUNICIPAL WATER DISTRICT

CIVIL ENGINEER OF SUBDIVISIONS — DATE

APPROVALS		INITIAL	DATE
	PROJECT ENGR.		
	OPERATION		
	W.O.	S.A.	COORD.

COUNTY OF "RIVERSIDE"

APN-327-190-019
RECYCLED WATER LANDSCAPE IMPROVEMENT PLANS
PERRIS VALLEY BIG LEAGUE DREAMS
INDEX SHEET

W.O. 12711
I.D. 98
S.A. 37
COORD. 37C-43
SHT. LI-1.2 OF 15
SD
D-

MOORE IACOFANO GOLTSMAN, INC.
801 HARBOR BLVD.
FULLERTON, CA 92832
TEL 714/871-3638
FAX 714/871-1188
www.migcom.com

BILL L WILLIAMS
IRRIGATION DESIGN & CONSULTANT
2518 E. Roberta Dr. Orange, Ca. 92867
CELL 714-504-4033, FAX 714-771-0344
bill@williamsidc.com e-mail

PROJECT TEAM:
LANDSCAPE ARCHITECT
MIG INC.
ARCHITECT
PITASSI ARCHITECTS INC.
CIVIL ENGINEERS/SURVEYOR
WALDEN & ASSOCIATES
STRUCTURAL ENGINEERS
CORREIA CONSULTING & DESIGN
ELECTRICAL ENGINEERS
LRA ENGINEERS
IRRIGATION DESIGNER
WILLIAMS IRRIGATION DESIGN
GEOTECHNICAL ENGINEERS
CONVERSE CONSULTANTS
TURF GRASS CONSULTANT
GUISE AND ASSOCIATES

PERRIS VALLEY Big League Dreams

2155 Trumble Road
Perris, California, 92570

SHEET TITLE
INDEX SHEET

100% CONSTRUCTION DOCUMENT

DATE	REVISIONS

STAMP

CHECKED BY	DATE
BLW	07-22-09
DATE 07-30-09	FILE NAME
DRAWN BY BLW	SHEET LI-1.2
JOB NO. 05208.00	
SCALE	275b OF 313 SHEETS