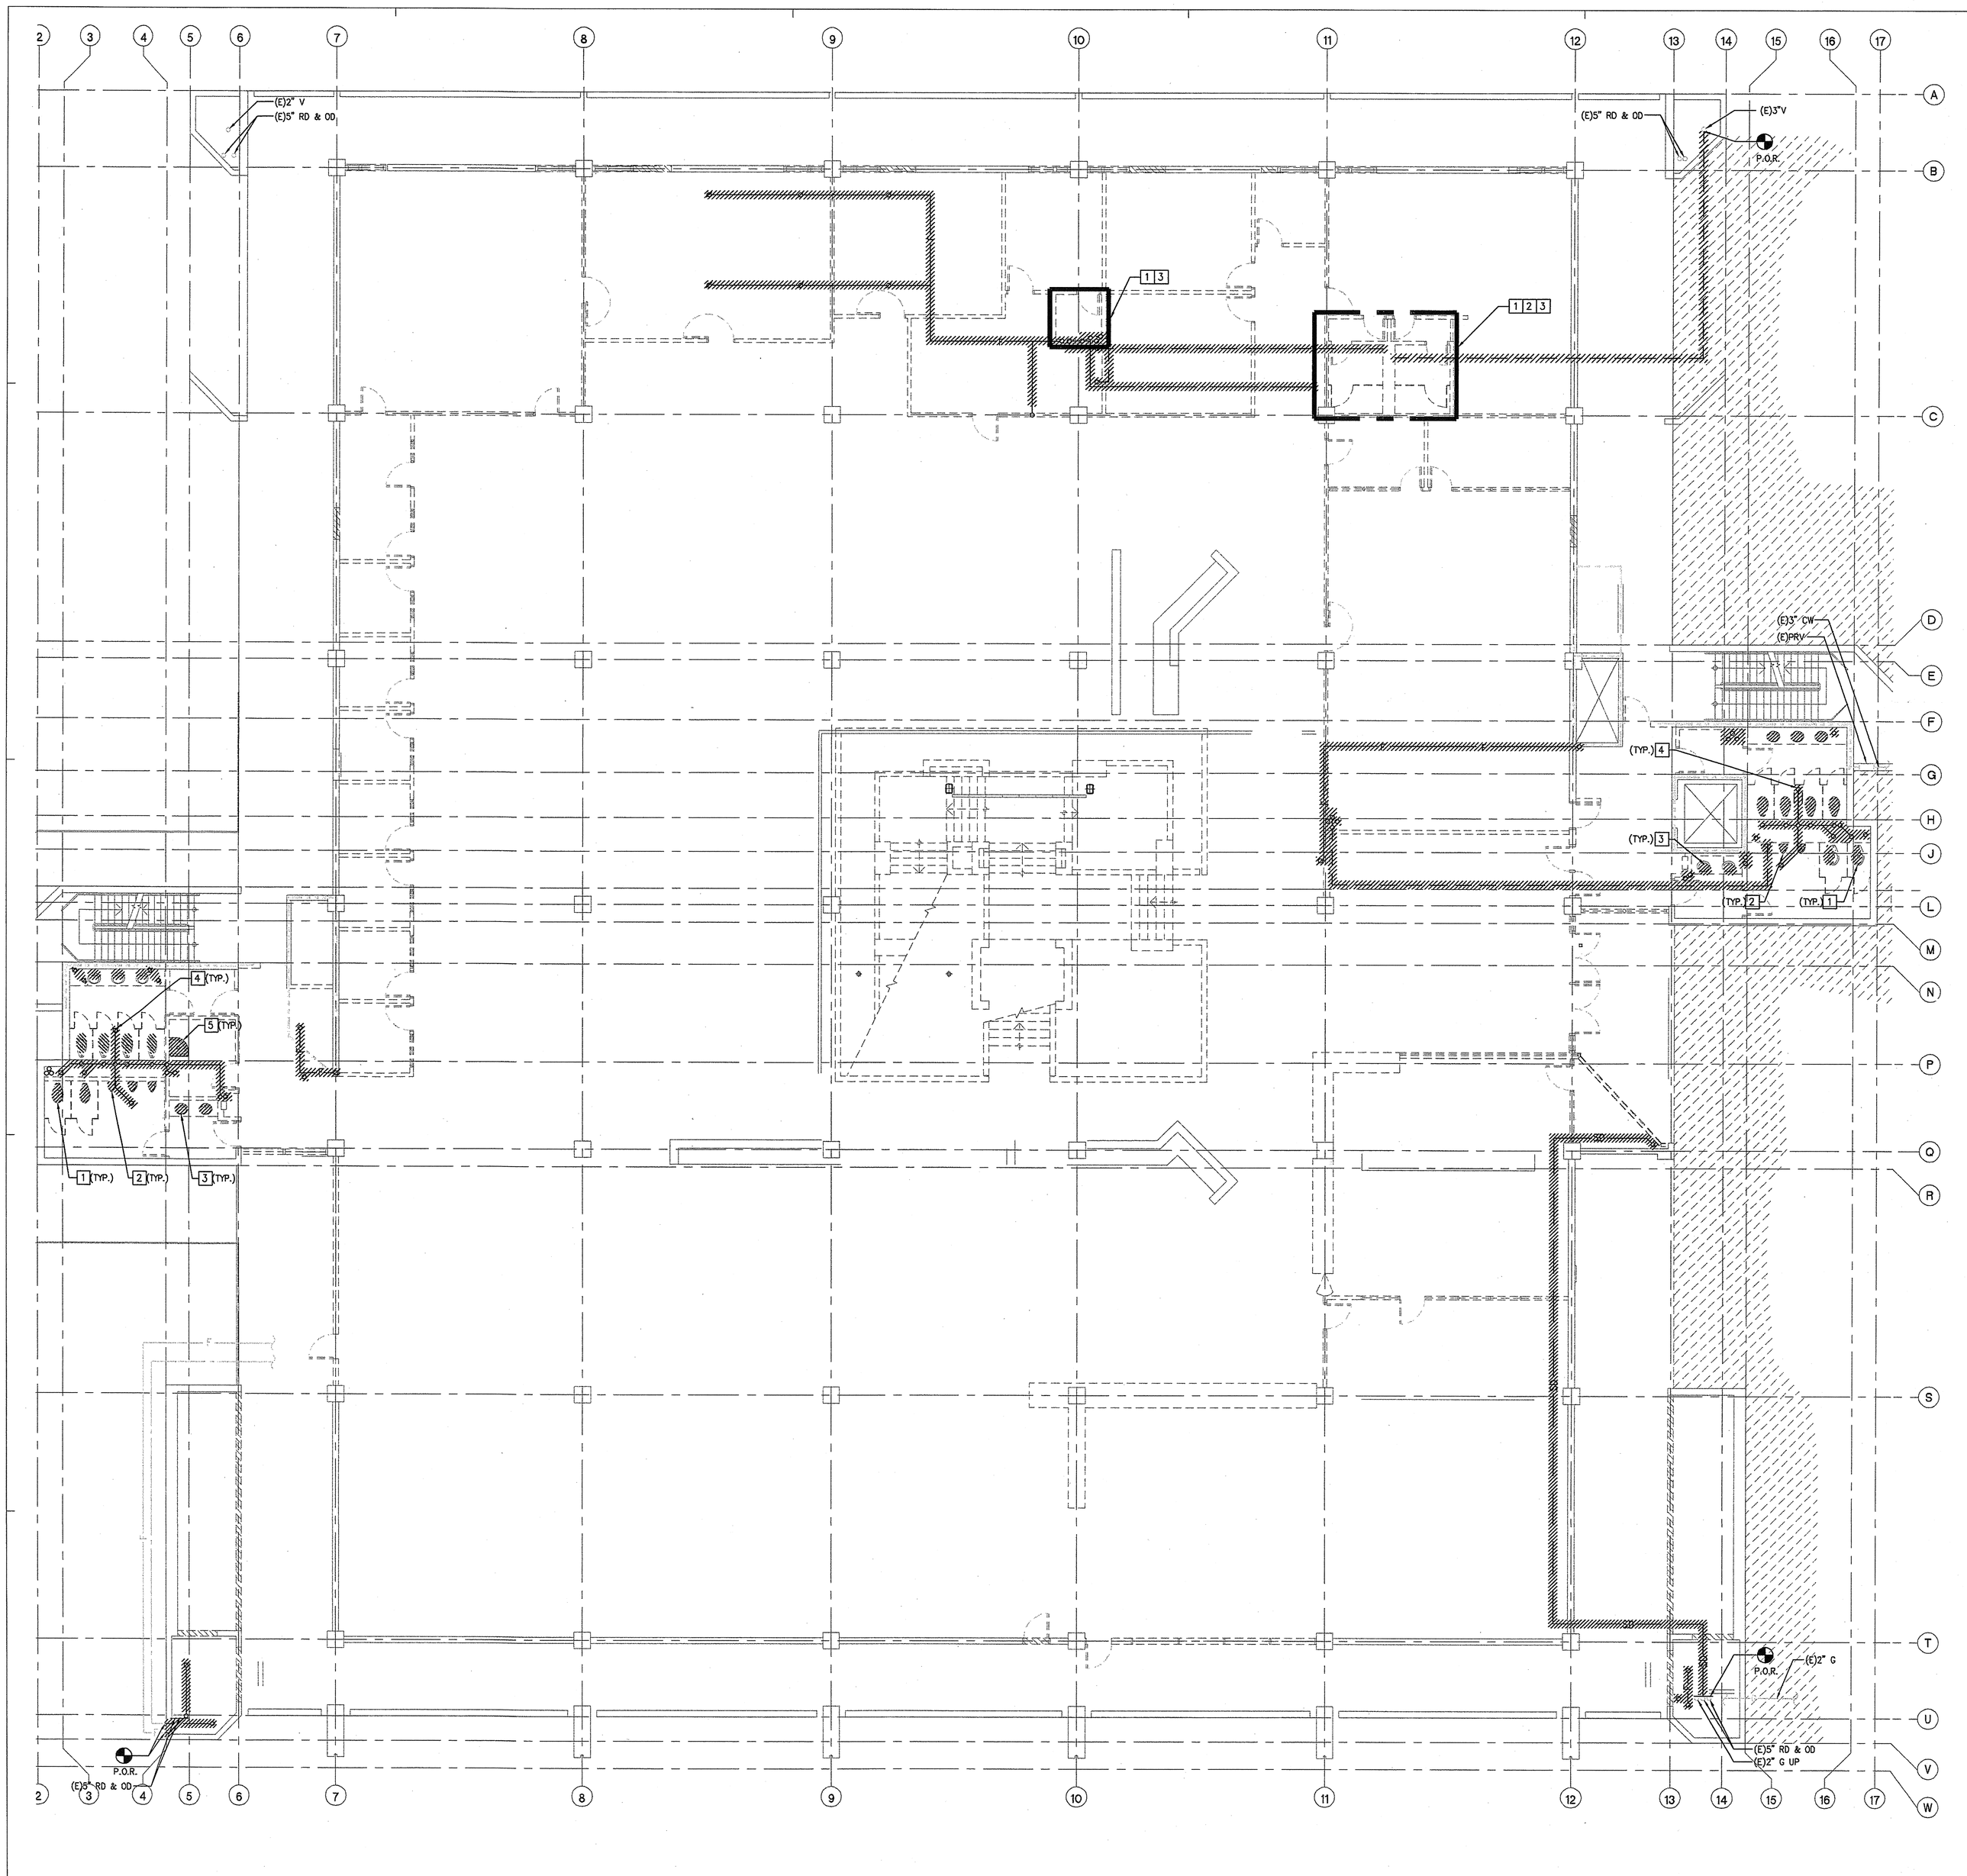

DEMOLITION GENERAL NOTES

1. REMOVE EXISTING CW, HW, VENT AND WASTE PIPING SERVING FIXTURES THAT WILL BE DEMOLISHED, AND AS SHOWN. REUSE EXISTING CW, HW, VENT, AND WASTE PIPING TO SERVE NEW FIXTURE IN SAME LOCATION AS EXISTING.
2. ALL PIPING SHOWN ON PLANS LIGHT SHADED AND NOT INDICATED OR SHOWN TO BE REMOVED, SHALL BE EXISTING TO REMAIN UNLESS NOTED OTHERWISE. (U.N.O.)
3. REMOVE EXISTING WASTE PIPING BELOW SLAB IN CONFLICT WITH NEW WASTE PIPING INSTALLATION. PROVIDE NECESSARY SAW CUTTING FOR REMOVAL AND NEW INSTALLATION. VERIFY AND LOCATE EXISTING WASTE PIPING PRIOR TO COMMENCEMENT OF WORK.

DEMOLITION KEYNOTES

1. REMOVE EXISTING WATER CLOSET AND ALL ASSOCIATED PIPING.
2. REMOVE EXISTING URINAL AND ALL ASSOCIATED PIPING.
3. REMOVE EXISTING LAVATORY AND ALL ASSOCIATED PIPING.
4. REMOVE EXISTING FLOOR DRAIN AND ALL ASSOCIATED PIPING.
5. REMOVE EXISTING SERVICE SINK AND ALL ASSOCIATED PIPING.

SADDLEBACK COLLEGE

gkkworks
2355 Main Street Suite 220
Irvine | CA 92614
949 250 1500
949 955 2708 fax

Architect Seal

Consultant and Seal

REGISTERED PROFESSIONAL ENGINEER
CHRIS D. FUNDAMENT
No. 24017
MECHANICAL
STATE OF CALIFORNIA

Fundament & Associates Inc.
Engineering Consultants
26 Executive Park, Suite 100, Irvine CA 92614 (949) 251-1151

Agency Approval

VERIFICATION STAMP
DIV OF THE STATE ARCHITECT
OFFICE OF REGULATION SERVICES
04 105129
DATE MAY 07 2008

No.	Date	Revision/Issue

Project Name

JAMES B. UTT MEMORIAL LEARNING RESOURCE CENTER RENOVATION

28000 Marguerite Parkway
Mission Viejo, California 92692

Checked By	Drawn By

Sheet Title

PLUMBING SECOND FLOOR DEMOLITION PLAN

Sheet Number

PD2.02

Project Number	Scale
04-111	1/8"=1'-0"

©2008 gkkworks, All Rights Reserved
NO PART OF THE CONTENTS OF THIS DOCUMENT MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN PERMISSION OF GKKWORKS.

J:\7113-Saddleback Library\Plumb\7113-PD202.dwg 04/16/2008

DRS31777-5169? P1 S2 - R C CONSTRUCTION SERVICES - PG 183 OF 235 (P1 S2) 1 SET.1IF -2/2/2010 - 15:34