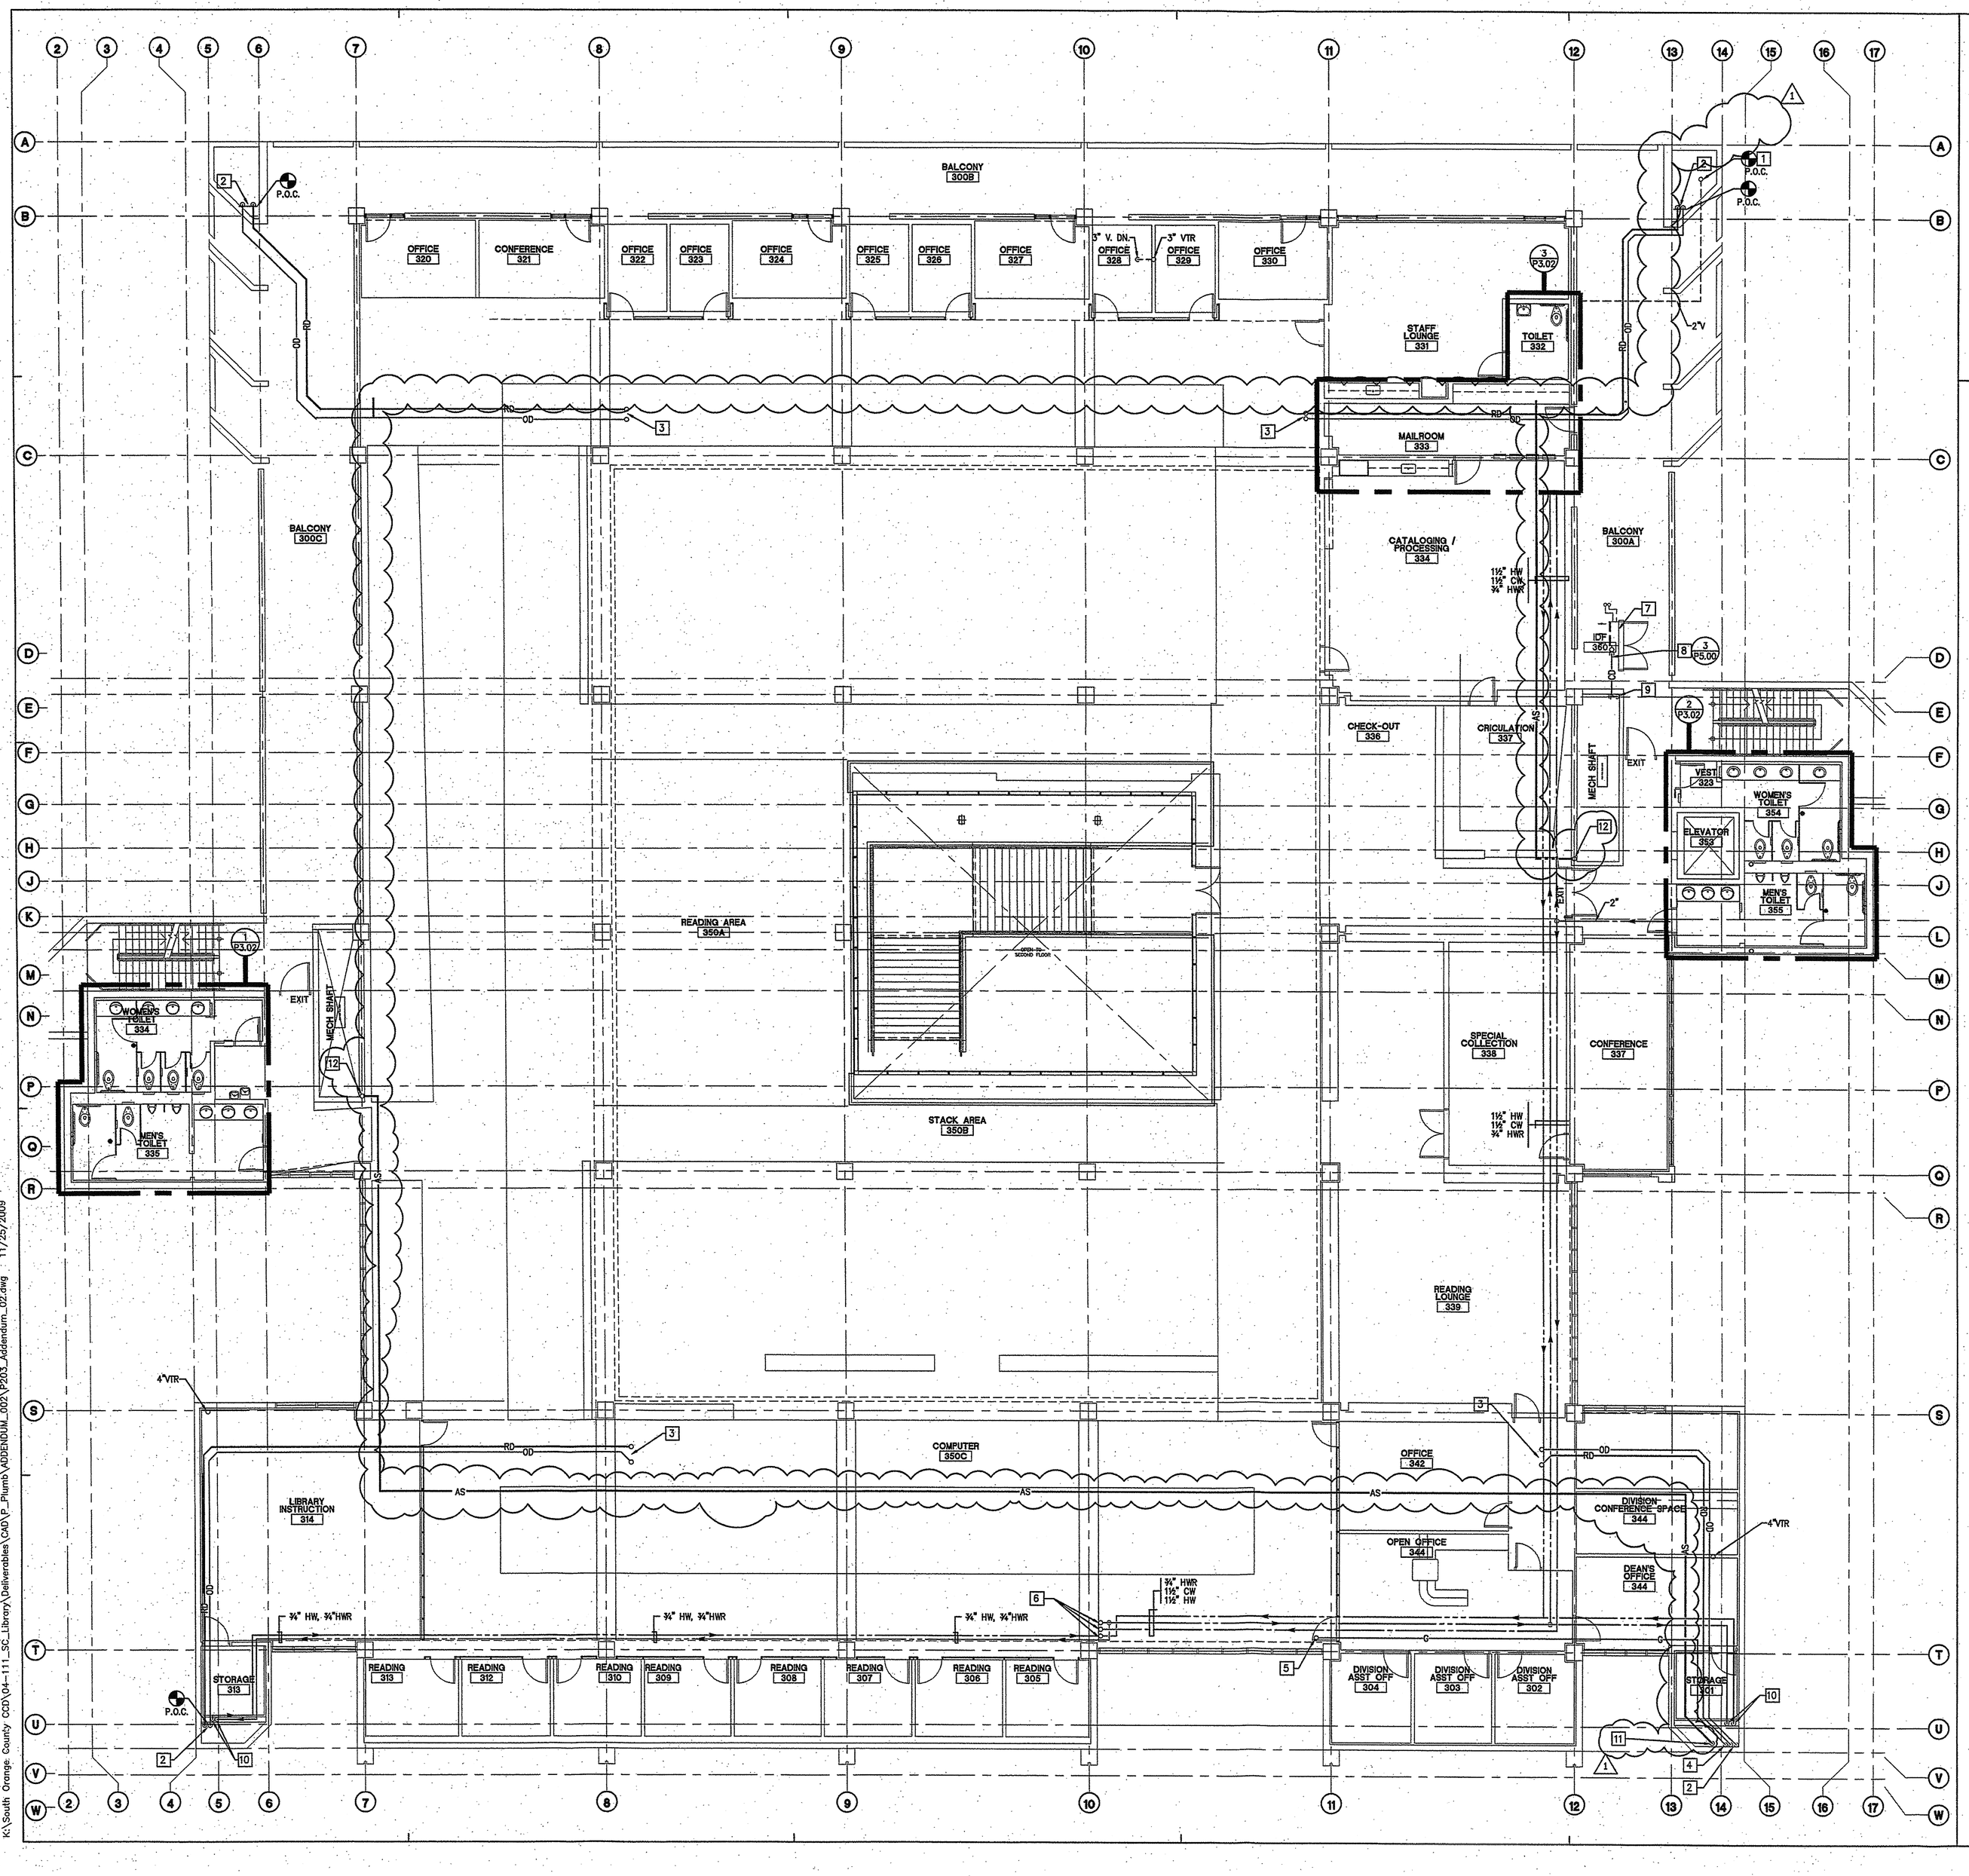

RENOVATION GENERAL NOTES

1. REFER TO SHEET P0.01 FOR GENERAL NOTES.

RENOVATION KEYNOTES

1. CONNECT NEW 2" VENT TO EXISTING 3" VENT.
2. NEW 5" ROOF DRAIN AND OVERFLOW DRAIN DOWN TO BELOW.
3. NEW 5" ROOF DRAIN AND OVERFLOW DRAIN UP TO LEADER.
4. NEW 2" GAS UP.
5. NEW 2" GAS UP TO ABOVE.
6. 1½" HOT AND COLD WATER, AND ¾" HOT WATER RETURN UP TO ABOVE.
7. MECHANICAL EQUIPMENT SHOWN FOR REFERENCE. REFER TO MECHANICAL PLANS FOR ADDITIONAL INFORMATION.
8. ¾" CONDENSATE DRAIN PIPING FROM FC TO INDIRECT WASTE CONNECTION.
9. 1" CONDENSATE DRAIN DOWN FROM ABOVE.
10. NEW ¾" HOT WATER & HOT WATER RETURN DOWN TO BELOW.
11. NEW 6" AUTOMATIC SPRINKLER, CLASS III STANDPIPE SYSTEM, DOWN TO BELOW.
12. NEW 6" AUTOMATIC SPRINKLER, CLASS III STANDPIPE SYSTEM, UP TO ABOVE.

SADDLEBACK COLLEGE

gkkworks
2355 Main Street Suite 220
Irvine | CA 92614
949 250 1500
949 955 2708 fax

Architect Seal

Consultant and Seal

REGISTERED PROFESSIONAL ENGINEER PHILIP FUNDAMENT No. 24311 Exp. 9-30-10 MECHANICAL STATE OF CALIFORNIA

Fundament & Associates Inc. Engineering Consultants
28 Executive Park, Suite 100, Irvine CA 92614 (949) 261-1121

Agency Approval

No.	Date	Revision/Issue
1	8/24/09	ADDENDUM #2

Project Name

JAMES B. UTT MEMORIAL LEARNING RESOURCE CENTER RENOVATION
28000 Marguerite Parkway
Mission Viejo, California 92692

Checked By	Drawn By
EM	AD

Sheet Title

PLUMBING
THIRD FLOOR
RENOVATION PLAN

Sheet Number

P2.03

Project Number	Scale
04-111	1/8"=1'-0"

© 2009 gkkworks, All Rights Reserved
NO PART OF THE CONTENTS OF THIS DOCUMENT MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN PERMISSION OF GKKWORKS.

K:\South Orange County CCD\04-111_SC_Library\Deliverables\CAD\P_Plumb\ADDENDUM_002\P203_Addendum_02.dwg : 11/25/2009

OR31777-51697 P1 S2 - R C CONSTRUCTION SERVICES - PG 188 OF 235 (P1 S2) 1 SET.TIF - 2/3/2010 - 15:34